


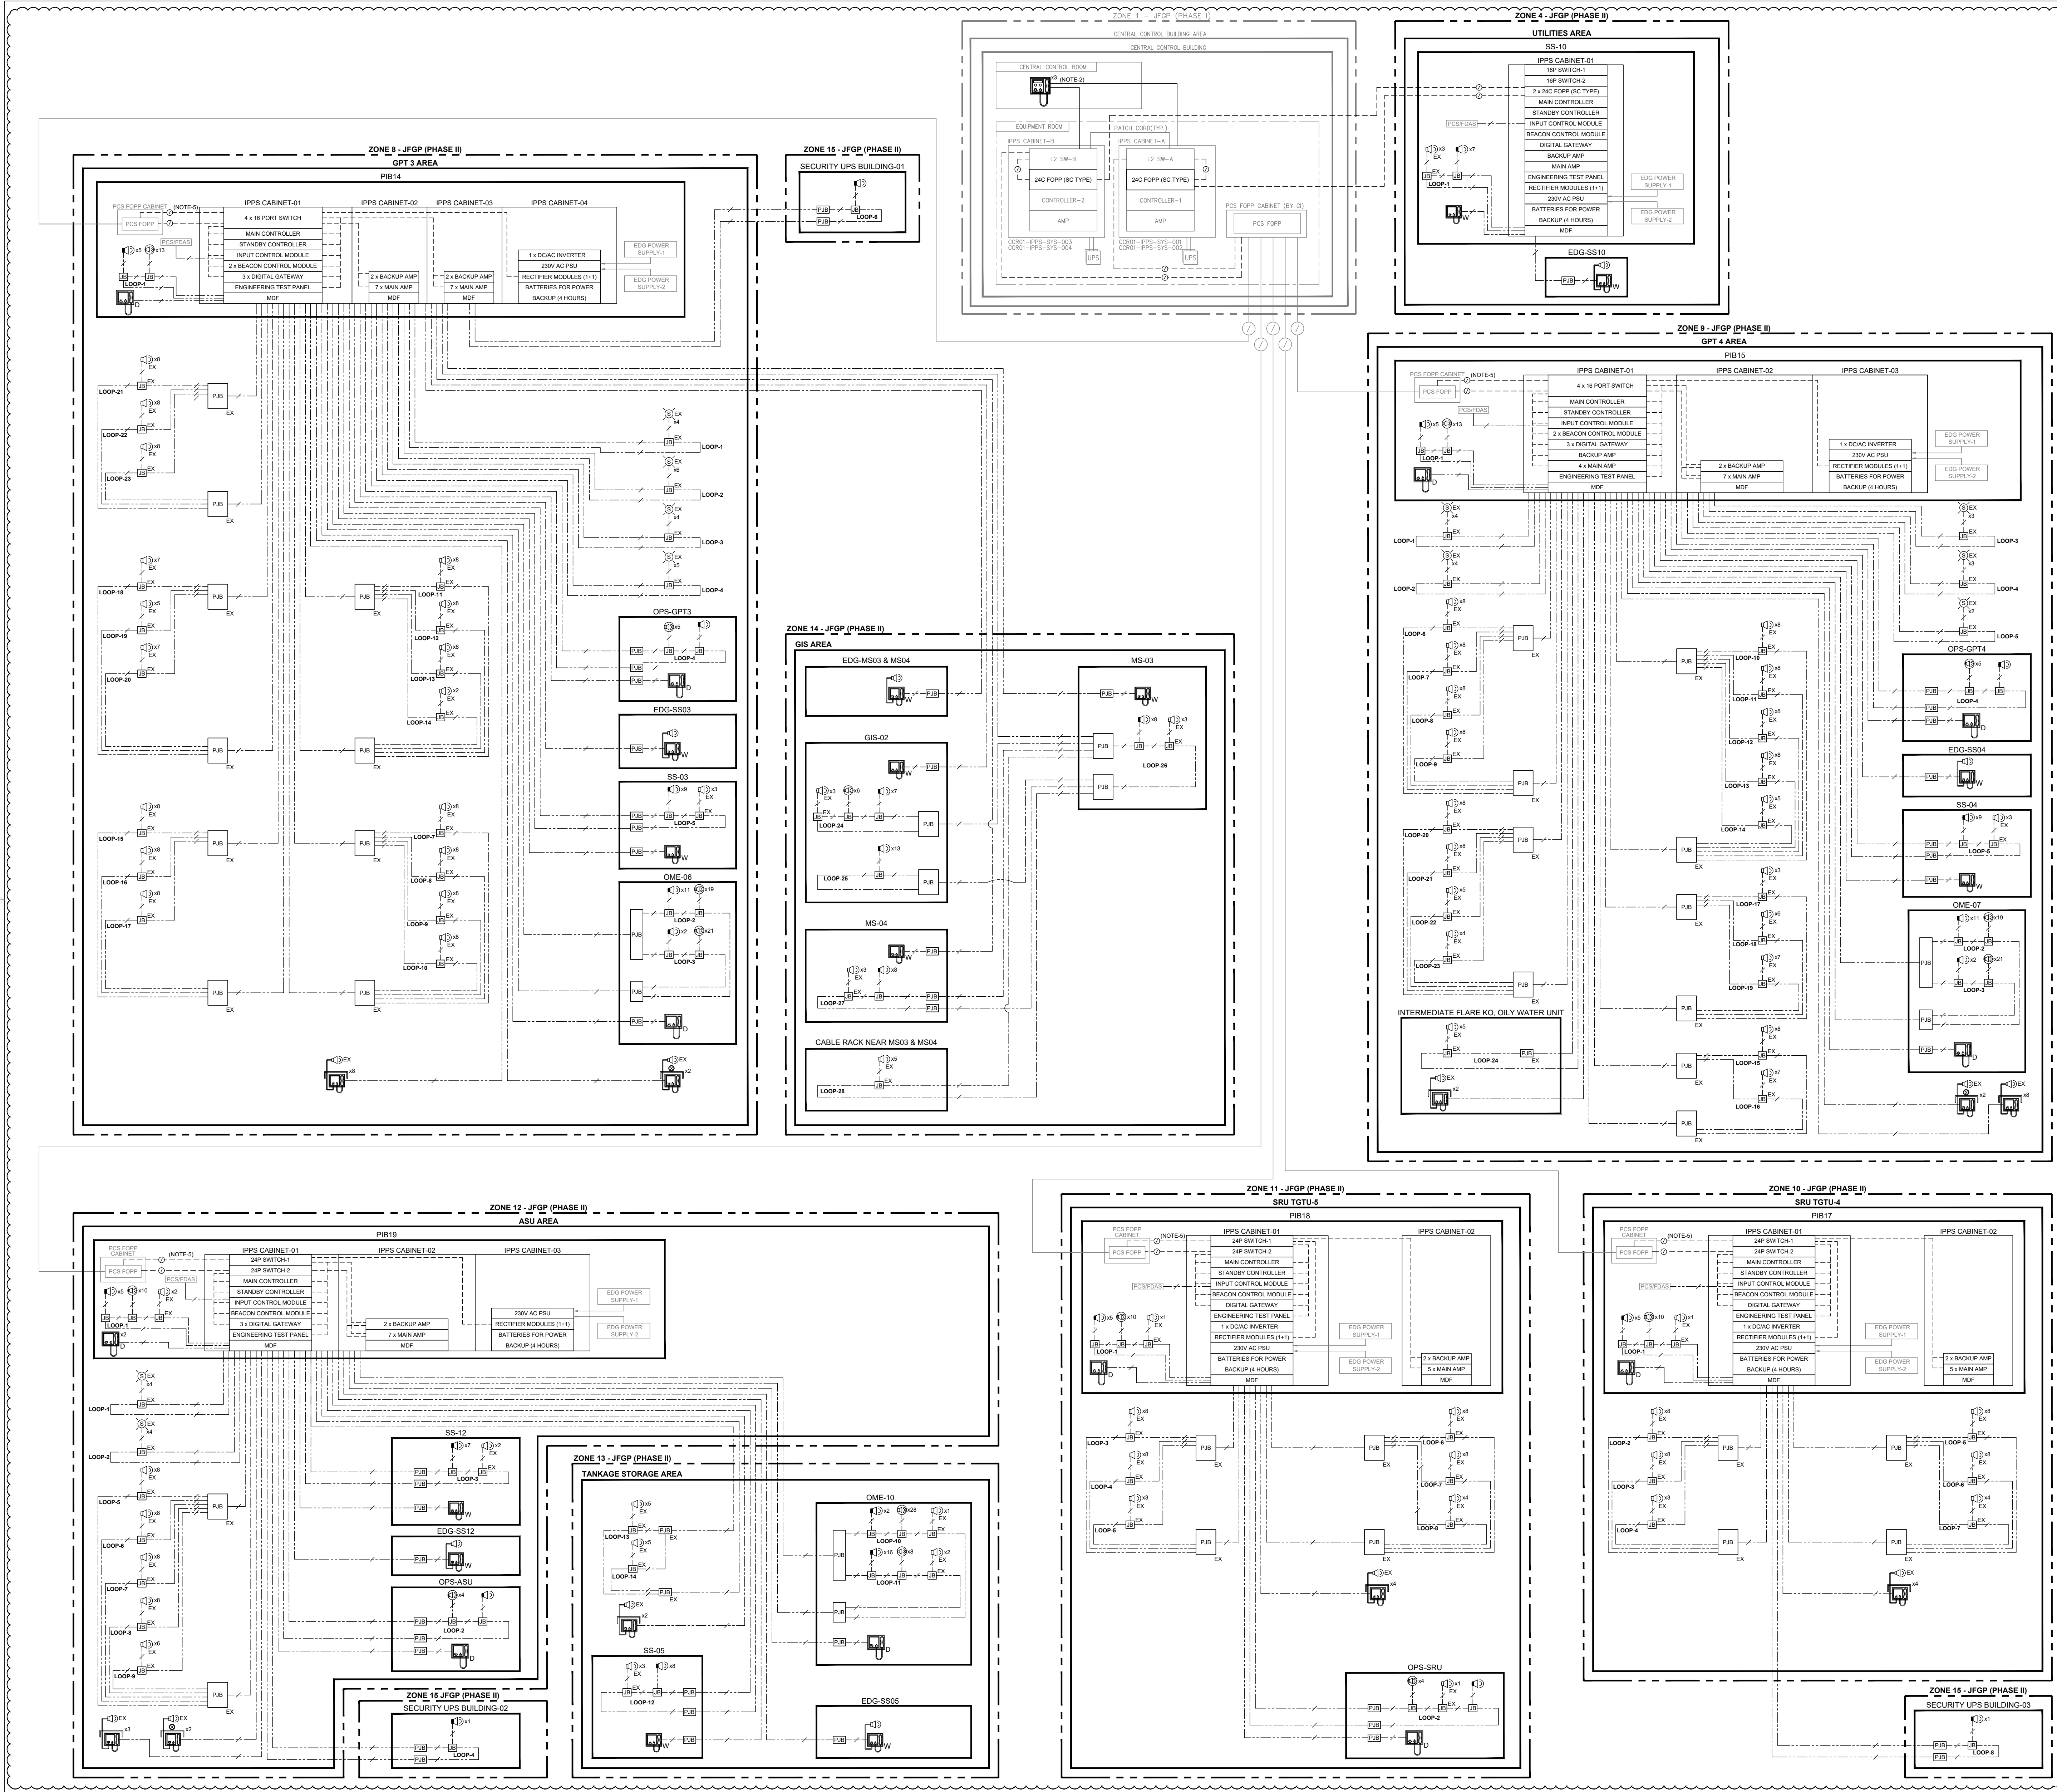

- NOTES:
1. REFER TO THE BILL OF MATERIAL - IN PLANT PAGING SYSTEM FOR THE ACTUAL QUANTITY OF THE IPSS COMPONENTS IN THE DESIGN.
 2. MASTER MULTI-PARTY OPERATOR ACCESS PANEL INSTALLED INSIDE CCR OF PHASE I WILL BE SUPPLIED UNDER THE SCOPE OF THIS PROJECT. CAT6 UTP PATCH CORD / CABLE FOR CONNECTING THE OPERATOR ACCESS PANEL TO THE EXISTING SWITCH OF JFGP PHASE I WILL BE SUPPLIED BY OTHERS.
 3. ALL THE COMPONENTS WITHIN CENTRAL CONTROL BUILDING DEPICTED IN GREY WILL BE SUPPLIED BY OTHERS.
 4. IT IS ASSUMED THAT THE EXISTING FIBER OPTIC PATCH PANEL AND SWITCHES INSIDE THE IPSS NODES INSIDE EQUIPMENT ROOM HAVE SUFFICIENT PORTS TO INTERFACE WITH IPSS REMOTE NODES OF JFGP PHASE II.
 5. FO PATCH CORDS (SC-LC TYPE, 15 METERS) FOR INTERFACING IPSS REMOTE NODES OF JFGP PHASE II WITH THE PCS FOPP (BY OTHERS) WILL BE SUPPLIED UNDER THE SCOPE OF THIS PROJECT.
 6. FIBER OPTIC CABLING IS CONSIDERED AS STAR TOPOLOGY, EXTENDING FROM THE PCS FOPP CABINET WITHIN THE EQUIPMENT ROOM OF JFGP PHASE I TO THE PCS FOPP CABINET ADJACENT TO THE IPSS REMOTE NODES IN JFGP PHASE II.
 7. ALL THE FIELD CABLES INCLUDING FIBER OPTIC CABLE AND POWER CABLE WILL BE PROVIDED BY CONTRACTOR. SPEAKER CABLE TAIL, BEACON CABLE TAIL, SPEAKER LOOP CABLE, BEACON LOOP CABLE, PAGING LINE CABLE, CABLES FROM THIRD PARTY SYSTEM AND CABLE GLANDS FOR ALL THE MENTIONED CABLES WILL BE PROVIDED BY CONTRACTOR.
 8. THE IPSS REMOTE NODES OF JFGP PHASE II WILL INTERFACE WITH THE THIRD PARTY SYSTEMS LIKE PCS AND FDAS. NUMBER OF IO CONTACTS, CONFIGURATION OF THE IO CONTACTS AND THE CABLE DETAILS WILL BE PROVIDED BY CONTRACTOR.
 9. IPSS SYSTEM WILL BE INTERFACED WITH ESS SYSTEM THROUGH HARD WIRED CONTACTS. THIS INTEGRATION WILL HAPPEN AT THE EXISTING CENTRAL LOCATION OF JFGP PHASE I.
 10. THE BATTERY BACKUP FOR IPSS NODES WILL BE CONFIGURED TO PROVIDE 3 HOURS 30 MINUTES IN QUIET MODE, FOLLOWED BY 30 MINUTES IN FULL LOAD OPERATION MODE.

DOCUMENT STATUS

- ☐ 1 : REJECTED
- ☐ 2 : COMMENTS AS NOTED
- ☐ 3 : MINOR COMMENT
- ☐ 4 : NO COMMENT
- ☐ 5 : INFORMATION ONLY

NOTE : Permmision to proceed does not constitute acceptance of approval of design detail, calculations, analysis, test methods or materials developed/selected by the supplier and does not relieve the supplier from full compliance with contractual obligations.

REVIEW DATE:

ENGINEER

LEAD ENGINEER

0	13/05/25	ISSUED FOR CONSTRUCTION	SS	AK/SN	PN
A	20/01/25	ISSUED FOR REVIEW	SS	AK/SN	PN
REV.NO.	DATE	DESCRIPTION	PREP	CHECK	APPR



VENDOR DRAWING NO. CT-T5140-ED-0022

SCALE: NONE

REVISION VALIDATION

THIS REVISION NO. 0 IS COVERED, FOR ALL APPROVAL AND CERTIFICATION REQUIREMENTS, PER SAEP-334, UNDER DRAWING COMPLETION CERTIFICATE NO:

10-14815-0004-001

DESIGN CERTIFICATION (DESIGN AGENCY)	REVIEW FOR KEY DRAWINGS REQUIRED (SAUDI ARAMCO)	OTHER
ENG./DATE AK 13/05/25	CERTIFIED BY/DATE AK 13/05/25	CONST. AGENCY/DATE OPERATIONS/DATE BY/DATE
REV.NO.	DATE	REVISION DESCRIPTION

0 13/05/25 ISSUED FOR CONSTRUCTION

JOB ORDER/EWO NO.
10-14815-0004

THIS REVISION IS NOT TO BE USED FOR CONSTRUCTION UNTIL CERTIFIED AND DATED

SAUDI ARABIAN OIL COMPANY

SYSTEM BLOCK DRAWING

DRAWING TYPE
SCM

IPSS SYSTEM

JFGP COMMON FACILITIES

JAFURAH SAUDI ARABIA

PLANT NO.	INDEX	DRAWING NUMBER	SHT. NO.	REV. NO.
861	T	VD-TE0002-022	002	0